


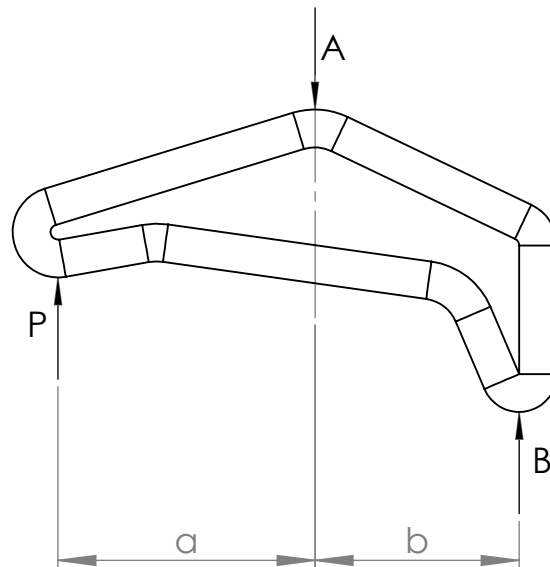

Klemm- platte	Belastung	Auflager- kraft	Vorspannkraft der 8.8 - Schraube	Anziehmoment MoS ₂ geschmiert	Übertragbare H-Kräfte $\mu=0,1$
für Schraube	P [kN]	B [kN]	A [kN]	MV [Nm]	H [kN]
M10	$\alpha=17$; $b=13,5$ 5,15	6,48	11,63	16,47	0,52
M12	$\alpha=20$; $b=16$ 9,37	11,72	21,09	35,50	0,94
M12 AL	$\alpha=30$; $b=16$ 4,00	7,50	11,50	18,10	0,40
M16	$\alpha=27$; $b=21$ 16,31	20,97	37,28	84,10	1,63
M16 AL	$\alpha=80$; $b=50$ 9,50	16,80	26,30	58,50	0,95
M20	$\alpha=34$; $b=26$ 26,56	34,73	61,29	171,50	2,66